


# Shaft-Mounted Clutches

## Product Overview


### CCC Clutch Coupling

The compact CCC Clutch-Coupling offers a high torque-to-size ratio meeting a broad range of applications. Available in five sizes. CCC Clutch-Couplings can be used in almost any coupling application where on-off control of rotary motion is required. Available for 90-100, 24-28, or 12 Vdc operation.

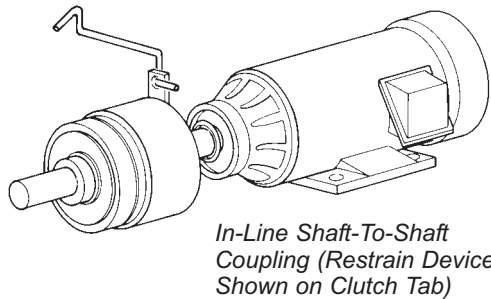


### CRP Roto Sheave Clutches

The performance, quality, and life of this unit have been proven in thousands of applications. This one-piece, pre-aligned unit has an integral sheave for quick, convenient installation and maintenance. Available in four sizes from 100 lb-in to 1740 lb-in with a variety of standard sheaves. An ideal solution for almost any parallel shaft drive application. Available for 90-100, 24-28, or 12 Vdc operation.

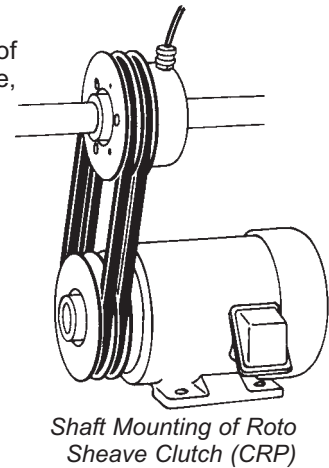


### CRS Roto-Sprocket Clutch

An ideal solution for almost any parallel shaft drive application, this unit has been proven in thousands of applications. This one-piece, pre-aligned unit has a special adapter hub that accepts a plate-type sprocket. Installation and maintenance are quick and convenient. Available in four sizes, from 100 lb-in through 1740 lb-in nominal static torque.

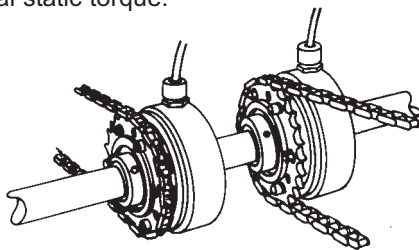


### CTS Through-Shaft Clutch

The compact CTS Clutch offers a high torque-to-size ratio in an economical unit that meets a broad range of applications. Available in three sizes. Extended thru-shaft driven hub is adaptable for mounting pulleys, gears, or sprockets. CTS Clutches can be used in almost any parallel shaft application where on-off control of rotary motion is required. Available for 90-100, 24-28, or 12 Vdc operation.

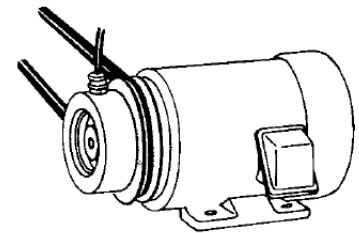


Stearns Shaft-mounted clutches can be ordered as a standard dc unit, with the option of a separate rectifier (see page 47 for information on rectifier packages), or as a Tor-ac unit which has a built-in rectifier.

### Wiring of standard dc unit with optional ac rectifier



### Wiring of Tor-ac unit with built-in rectifier

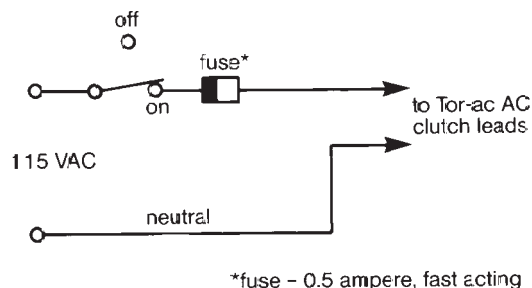

# CRS Clutch-Roto Sprocket® Unit

- CSA certified.
- Ball bearing-mounted adapter hub and magnet body for long, trouble-free life.
- Pre-aligned, one-piece package can be mounted almost anywhere: line shaft, motor shaft, or stub shaft.
- Mounts in any position without special modifications.
- Spring release for positive disengagement.
- Non-asbestos friction linings provide smooth, shock-free operation.
- Zinc plated magnet body for corrosion resistance.
- Epoxy encapsulated coil construction for uniform heat transfer and moisture resistance.
- Class H magnet wire and potting material.
- Other sprocket configurations available, contact factory.



**Standard  
DC Clutch**



**Tor-ac Clutch with  
built-in rectifier**

Refer to *Installation and Service Instructions Sht. 8-078-800-02 and Parts List Sheets: 8-078-802-01 (Size 3.5) 8-078-802-02 (Size 5) 8-078-802-03 (Size 5.5) 8-078-802-04 (Size 8)*

## Minimum Usable Plate Sprockets, Type A

Clutch Size	Roller Chain Number										No. of teeth
	35	40	41	50	60	80	100	120	140	180	
3.5	35	27	26	-	-	-	-	-	-	-	-
5	35	27	27	22	19	-	-	-	-	-	-
5.5	42	32	32	26	22	18	15	-	-	-	-
8A Hub	40	28	28	23	20	-	-	-	-	-	-
8B* Hub	54	40	40	32	28	21	18	15	14	11	-

\*Maximum usable plate sprocket for Size 8A Hub.

**IMPORTANT NOTE:** Information and dimensioning relating to Tor-ac units shown in shaded area.

## Performance/List Price Data (Discount Symbol X-1)

Catalog Number	Size	Basic Model Number	Nominal Static Torque (lb-in)	Nominal Dynamic Torque at 1800 RPM (lb-in)	Max. RPM	Drive Hub Inertia (lb-ft²)	Thermal Capacity (ft-lb/min)①	Approx. Weight (lbs)	Maximum Electrical Power (watts)	Bore	List Price②
CRS-35	3.5	2-11-3162-00	100	65	5000	.00317	2750	4	11	3/8, 1/2, 5/8	\$2204.00
CRS-35T	3.5	2-11-3180-00	100	65	5000	.00317	2750	4	11	3/8, 1/2, 5/8	2208.00
CRS-50	5	2-11-4269-00	275	160	5000	.0164	4400	6	15	1/2, 5/8, 3/4, 7/8, 1	2468.00
CRS-50T	5	2-11-4280-00	275	160	5000	.0164	4400	6	15	1/2, 5/8, 3/4, 7/8, 1	2652.00
CRS-55	5.5	2-11-5525-00	720	400	3600	.0689	8250	12 <sup>3</sup> / <sub>4</sub>	26	3/4, 7/8, 1, 1 1/8, 1 1/4	3480.00
CRS-55T	5.5	2-11-5580-00	720	400	3600	.0689	8250	12 <sup>3</sup> / <sub>4</sub>	26	3/4, 7/8, 1, 1 1/8, 1 1/4	3664.00
CRS-80A	8A	2-11-8322-00	1740	1160	1800	.6640	16500	34	35	1 1/8, 1 1/4, 1 3/8, 1 1/2, 1 5/8, 1 3/4	6720.00
CRS-80B	8B	2-11-8323-00	1740	1160	1800	.6640	16500	34	35	1 1/8, 1 1/4, 1 3/8, 1 1/2, 1 5/8, 1 3/4	6720.00

① Thermal capacity rating is based on ambient temperature of 70°F at 1750 RPM. ② Sprocket available at additional cost. Consult factory. List prices subject to change without notice.

## Ordering Information

Example of a complete part number:

2-11-3162-00-L J —  
                                   └─ 90-100 Vdc  
                                   └─ 5/8 bore 3/16 x 3/32 keyway

### Bore and Keyway Table\*

Character	Bore/Shaft Dia. (in.)	Keyway (inches)
H	3/8	3/32 ξ 3/64
J	1/2	1/8 ξ 1/16
L	5/8	3/16 ξ 3/32
N	3/4	3/16 ξ 3/32
O	7/8	3/16 ξ 3/32
Q	1	1/4 ξ 1/8
R	1 1/8	1/4 ξ 1/8
T	1 1/4	1/4 ξ 1/8
U	1 3/8	5/16 ξ 5/32
V	1 1/2	3/8 ξ 3/16
X	1 5/8	3/8 ξ 3/16
Y	1 3/4	3/8 ξ 3/16

\*Special or metric bores available, consult factory.

### Voltage Table



Character	Voltage
C	12 Vdc
E	24-28 Vdc
J	90-100 Vdc
N*	115 Vac*

\*Includes rectifier. Not available on size 8.


# CRS Clutch – Roto Sprocket® Unit (continued)

## Dimensional Data (In Inches)

### Size 3.5

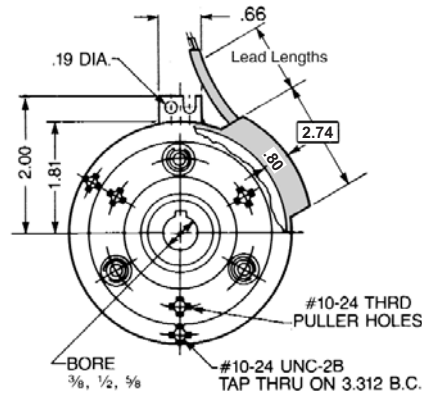
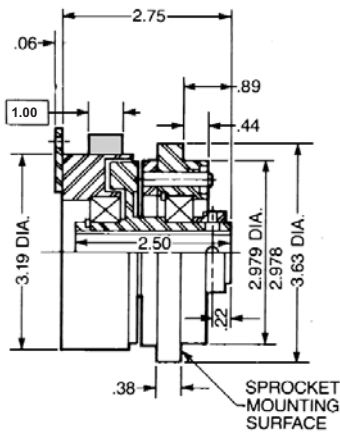


#### Sprocket Mounting Dimensions




Lead Lengths: All Tor-ac units have 32" leads. Standard DC unit has 18" leads.

### Size 5

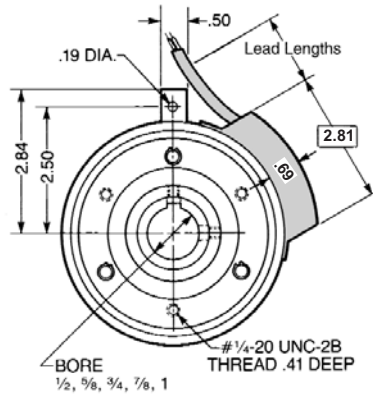
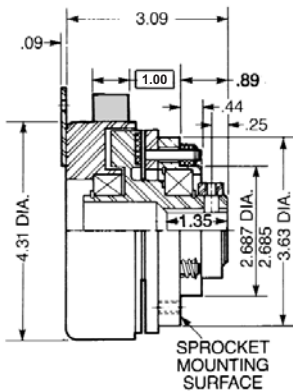


#### Sprocket Mounting Dimensions




Lead Lengths: All Tor-ac units have 32" leads. Standard DC unit has 18" leads.

### Size 5.5

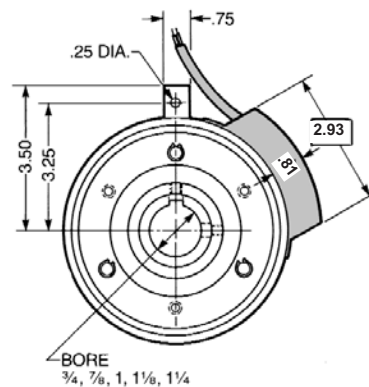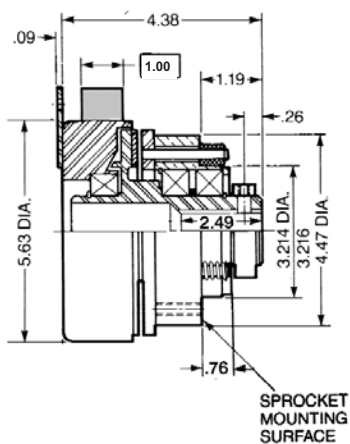

#### Sprocket Mounting Dimensions




Lead Lengths: All Tor-ac units have 32" leads. Standard DC unit has 24" leads.

Dimensions are for estimating only and subject to change without notice. For installation purposes, request certified prints.


# CRS Clutch – Roto Sprocket® Unit (continued)

## Dimensional Data (In Inches)

### Size 8A

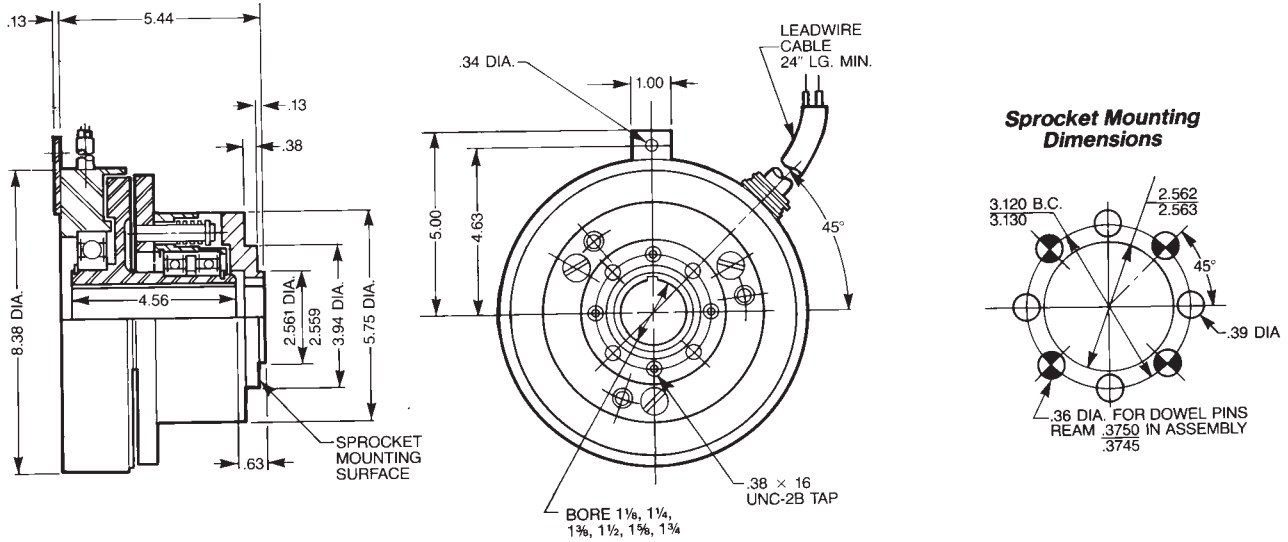

### Size 8B

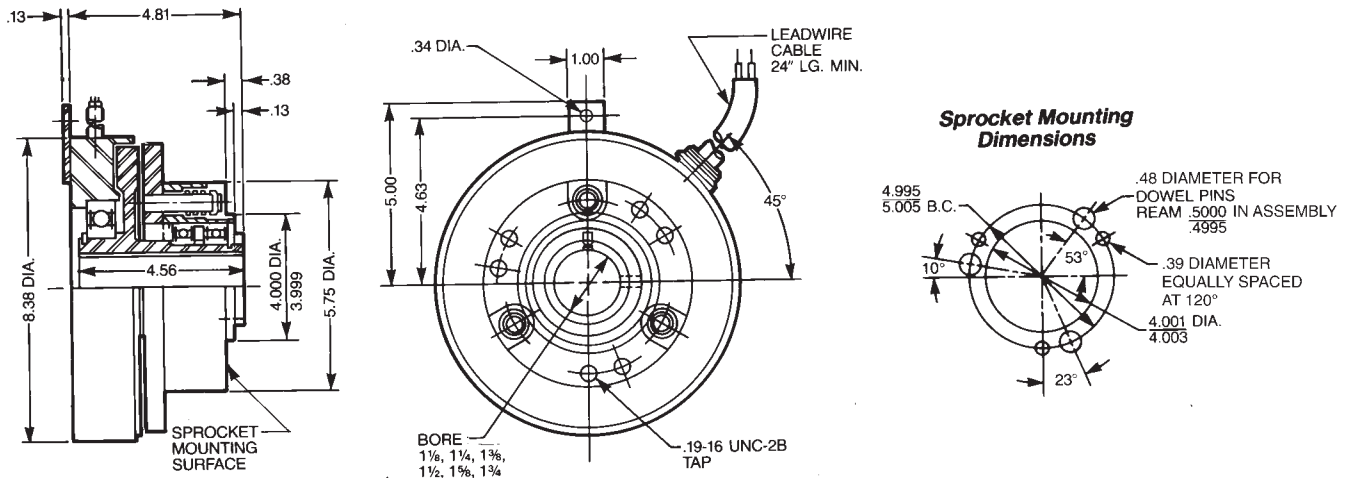

Dimensions are for estimating only and subject to change without notice. For installation purposes, request certified prints.

# For Convenience, Safety and Energy Savings, Look to Stearns® Rectifier Controls.

Perfectly matched to Stearns DC actuated clutches, brakes or combination units, Stearns rectifier controls offer solid-state reliability that also takes into account important human use factors, making them easy to utilize and maintain.

Stearns rectifier controls are available in fixed or adjustable output models with compact housings to simplify installation.

For ultimate convenience, all wiring connections are readily


accessible. The PR Series even goes one step further, offering the ease of modular plug-in designs connecting directly to octal sockets.

For safety, all models offered are fused to provide protection against overload and feature an arc suppression circuit, minimizing arcing and extending contact life. In the PR Series, the internal fuse can be changed only by removing the rectifier from its socket - eliminating a potential shock hazard.

For energy savings, efficiency is built into Stearns rectifiers. The adjustable voltage output on the PR-33, for example, uses thyristor control for a low 4-watt power loss-87% less than some competitive units.

When you need reliable performance and more, look to Stearns rectifier controls.



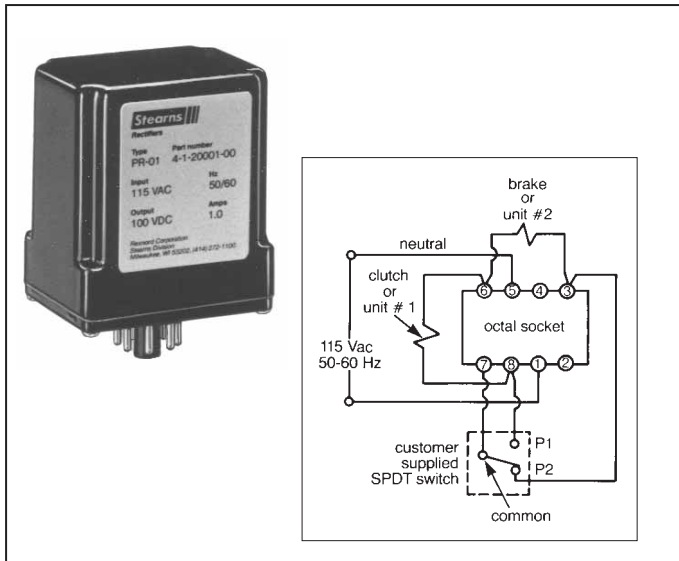


# Rectifier Controls

## Model PR-01

Two fixed 100 volt outputs.

- Modular plug-in design uses octal socket for easy mounting and wiring connection.
- Internally fused for overload protection.
- Operates one clutch or one brake, or both, one on at a time.

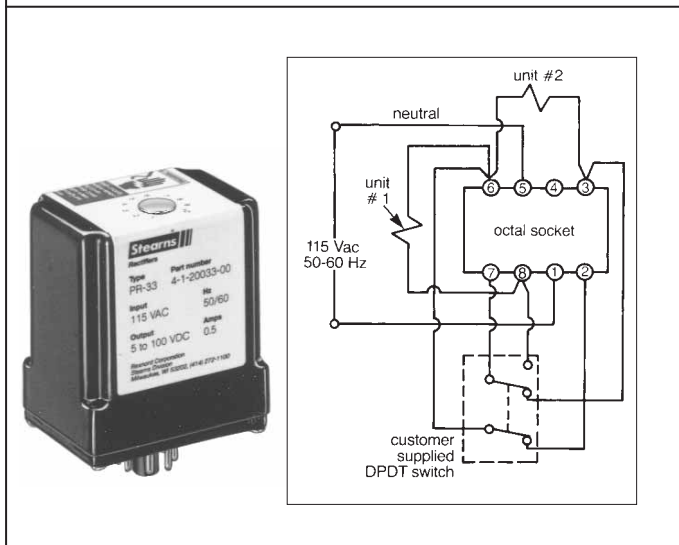

## Model PR-33

One fixed 100 volt output and one adjustable 15-100 volt output to allow reduced torque starts or stops for "soft" cushioned engagement.


- Adjustable control on top of housing for easy accessibility.
- Modular plug-in design uses octal socket for each mounting and wiring connection.
- Internally fused for overload protection.
- Operates one clutch or one brake, or both, one on at a time.

Enclosure dimensions apply to both PR-01 and PR-33.

### Performance/List Price Data

Rectifier Part Number	AC Input Voltage	Nominal DC Output			Control Circuits		Switching Relay	List Price ②	Discount Symbol
		Volts	Max. Amp①	Max. Watts	#1	#2			
PR-01 4-1-20001-00	115 50-60 Hz	100	1.0	100	Fixed	Fixed	No	\$266.00	X-1
PR-33 4-1-20033-00	115 50-60 Hz	15-100	0.5	50	Fixed	Variable	No	642.00	X-1

① Based on ambient temperature of 104°F.  
② List prices subject to change without notice.

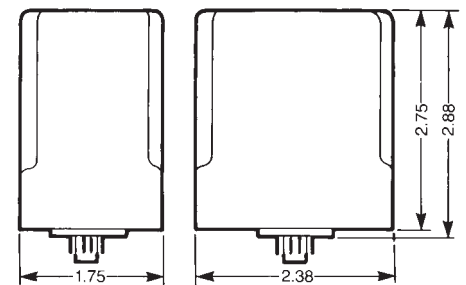


### Octal Socket(s)


Supplied with terminal screws and clips



Part Number: 9-61-0153-00  
Dimensions

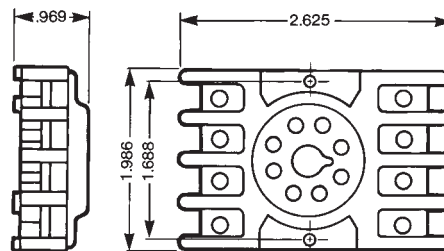

Part Number: 9-61-0153-01  
Dimensions

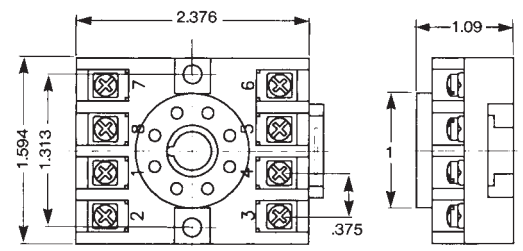


### List Price Data

Octal Socket Part Number	List Price	Discount Symbol
9-61-0153-00	\$128.00	X-1
9-61-0153-01	48.00	X-1


# Rectifier Controls

## Series 12000 Silicon Rectifiers

Heavy duty single-phase rectifier for use with Stearns heavy duty clutches and brakes. Incorporates a solid-state silicon bridge circuit for high efficiency and excellent voltage regulation. Available with outputs of 115 or 230 Vdc; power ratings of up to 1150 watts. A transformer provides isolation and dual AC input capability... 115/230 or 230/460 Vac. Each rectifier is housed in a NEMA 1 steel cabinet and includes a separately housed manual starter with overload heaters.

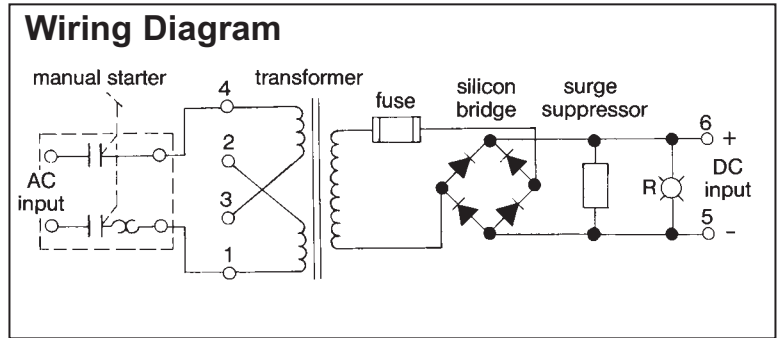

## Dimensional Data

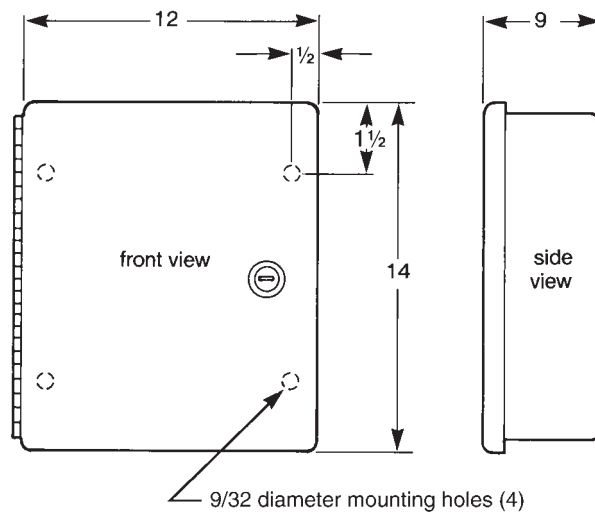


## Performance Data

Stock Number	AC Input (50/60 Hz Single-Phase)		DC Output		
	Volts	Amps	Volts	Amps <sup>①</sup>	Watts
4-1-12102-00	115/230	2.5/1.3	115	2.0	230
4-1-12104-00	115/230	6.4/3.2	115	5.0	575
4-1-12202-00	230/460	1.3/0.7	115	2.0	230
4-1-12205-00	230/460	3.2/1.6	115	5.0	575
4-1-12302-00	115/230	5.2/2.6	230	2.0	460
4-1-12305-00	115/230	13.0/6.5	230	5.0	1150
4-1-12402-00	230/460	2.6/1.3	230	2.0	460
4-1-12405-00	230/460	6.4/3.2	230	5.0	1150


① Based on ambient temperature of 104°F.

# Forcing Circuits


Combination forcing circuit and rectifier for use with Stearns SCE spring-set clutches and SCEB spring-set brakes. Suitable for use with all sizes from 800 through 1600. Provides the momentary forcing voltage necessary to release a clutch or brake. Units are available for 115, 208, 230, 460 and 575 Vac, 50/60 Hz input. The output of each unit is a forcing voltage of 230 Vdc which, after a 5 second delay, drops to a holding voltage of 70 Vdc. Circuitry includes surge suppression network to protect coil and minimize contact arcing. Complete circuit is housed in a NEMA 12 enclosure.

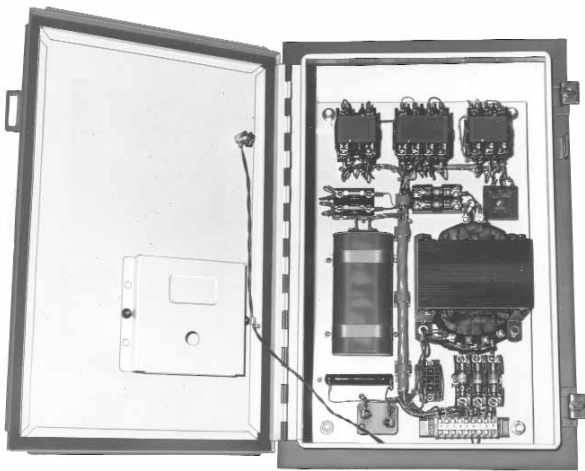

## Dimensional Data

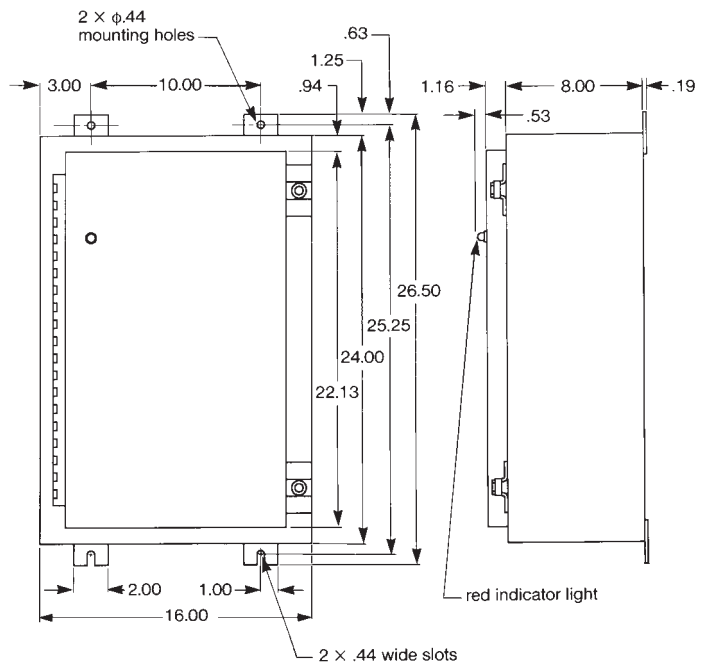

## Wiring Diagram

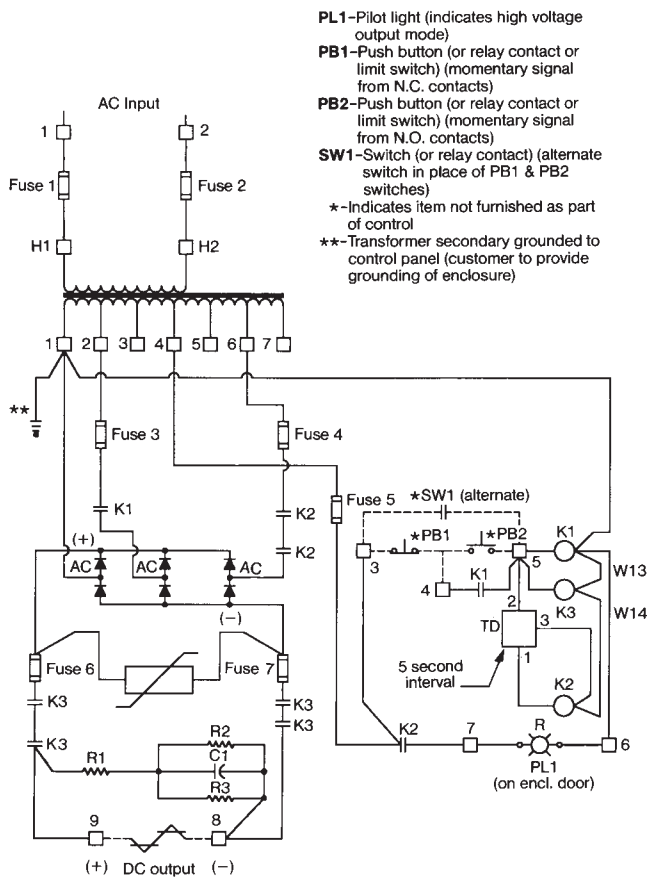

## Performance Data

Stock Number	AC Input Voltage 50/60 Hz	DC Input			Approx. Shipping Wt. (lbs.)
		Forcing Volts	Holding Volts	Watts	
4-3-00115-12	115 Vac	230	70	1000	60
4-3-00208-12	208 Vac	230	70	1000	60
4-3-00230-12	230 Vac	230	70	1000	60
4-3-00460-12	460 Vac	230	70	1000	60
4-3-00575-12	575 Vac	230	70	1000	60



# Application Engineering Data

## Basic Torque Formula:

$$T = \frac{hp \times 5,252}{N_{cb}} \times SF$$

Where:

T = Average dynamic torque, lb-ft

hp = Motor horsepower

SF = Service factor

$N_{cb}$  = rpm of the clutch/brake shaft

5,252 = Constant

## Inertia:

$$I = W \times K^2$$

Where:

W = Weight of the object

$K^2$  = The square of the radius of gyration

## Velocity, Linear:

$$V = \pi DN$$

Where:

$\pi = 3.142$

D = Diameter of drive head pulley

N = rpm

## Reflected Inertia - Linear:

$$Wk_L^2 = W \left( \frac{V}{2\pi N_{cb}} \right)^2$$

Where

W = The weight of the component, lb

V = The velocity of the component in feet per minute

$N_{cb}$  = The rpm of the clutch/brake shaft

## Reflected Inertia - Rotational:

$$Wk_r^2 = Wk_C^2 \times \left( \frac{N}{N_{cb}} \right)^2$$

Where:

$Wk_r^2$  = Inertia reflected to the clutch or brake

$Wk_C^2$  = Inertia of the component

N = rpm of the component

$N_{cb}$  = rpm of the clutch or brake shaft

## Dynamic Torque:

$$T_d = \frac{Wk^2 \times N}{308 \times t}$$

Where:

$T_d$  = Dynamic torque, lb-ft

$Wk^2$  = Total inertia seen by the clutch/brake (including the clutch/brake inertia and motor inertia if applicable), lb-ft<sup>2</sup>

N = rpm of the clutch/brake

t = Stopping time in seconds (or starting time)

308 = Constant

## Thermal Capacity:

$$E = 1.7 \times WR^2 \left( \frac{N}{100} \right)^2 \times F$$

Where:

E = Energy (heat) which needs to be dissipated, (ft-lb/min) for the application requirement

$WR^2$  = Total reflected inertia at clutch/brake shaft location. This should include clutch/brake inertia. (lb-ft<sup>2</sup>)

N = Speed differential in revolutions per minute (rpm) at the clutch/brake shaft.

F = Number of cycles per minute (cycle rate).

## Ohms Law:

Ohms = Volts/Amperes

$$\left( R = \frac{E}{I} \right)$$

Amperes = Volts/Ohms

$$\left( I = \frac{E}{R} \right)$$

Volts = Amperes × Ohms  
( $E = IR$ )

## Power - DC Circuits:

Watts = Volts × Amperes  
( $W = EI$ )

$$\text{Amperes} = \frac{\text{Watts}}{\text{Volts}} \left( I = \frac{W}{E} \right)$$

# Inertia Table

## Wk<sup>2</sup> of Steel Shafting or Disc per Inch of Length







Dia. (inch)	Wk <sup>2</sup> (lb-ft <sup>2</sup> )	Dia. (inch)	Wk <sup>2</sup> (lb-ft <sup>2</sup> )	Dia. (inch)	Wk <sup>2</sup> (lb-ft <sup>2</sup> )	Dia. (inch)	Wk <sup>2</sup> (lb-ft <sup>2</sup> )	Dia. (inch)	Wk <sup>2</sup> (lb-ft <sup>2</sup> )
1/8	4.53 × 10 <sup>-8</sup>	4	.0491	9 3/4	1.735	25	75.00	48	1019.2
1/4	7.47 × 10 <sup>-7</sup>	4 1/4	.0626	10	1.920	26	87.74	49	1106.8
3/8	3.83 × 10 <sup>-6</sup>	4 1/2	.0787	10 1/2	2.334	27	102.0	50	1200.0
1/2	1.21 × 10 <sup>-5</sup>	4 3/4	.0977	11	2.811	28	118.0	51	1298.9
5/8	2.93 × 10 <sup>-5</sup>	5	.1200	11 1/2	3.358	29	135.8	52	1403.8
3/4	6.07 × 10 <sup>-5</sup>	5 1/4	.1458	12	3.981	30	155.5	53	1514.9
7/8	.0001	5 1/2	.1757	12 1/2	4.687	31	177.3	54	1632.5
1	.0002	5 3/4	.2099	13	5.484	32	201.3	55	1756.9
1 1/8	.0003	6	.2488	13 1/2	6.377	33	227.7	56	1888.2
1 1/4	.0005	6 1/4	.2930	14	7.376	34	256.6	57	2026.7
1 3/8	.0007	6 1/2	.3427	14 1/2	8.487	35	288.1	58	2172.7
1 1/2	.0010	6 3/4	.3986	15	9.720	36	322.5	59	2326.5
1 5/8	.0013	7	.4610	15 1/2	11.08	37	359.8	60	2488.3
1 3/4	.0018	7 1/4	.5304	16	12.58	38	400.3	66	3643.1
1 7/8	.0024	7 1/2	.6075	16 1/2	14.23	39	444.2	72	5159.6
2	.0031	7 3/4	.6926	17	16.04	40	491.5	78	7166.7
2 1/4	.005	8	.7864	18	20.15	41	542.5	84	9558.9
2 1/2	.0075	8 1/4	.8894	19	25.02	42	597.4	90	12597
2 3/4	.0110	8 1/2	1.002	20	30.72	43	656.4	96	16307
3	.0156	8 3/4	1.125	21	37.34	44	719.6	102	20782
3 1/4	.0214	9	1.260	22	44.98	45	787.3		
3 1/2	.0288	9 1/4	1.405	23	53.73	46	859.6		
3 3/4	.0380	9 1/2	1.564	24	63.70	47	936.9		

To determine Wk<sup>2</sup> of a given shaft length or disc shape thickness, multiply the table value given above by the length, or thickness, in inches.

## Material Factors

Multiply the inertia of the steel diameter by the selected material.	
Bronze 1.1	Nylon .18
Aluminum .35	Cast iron .92

## Radius of Gyration, Squared

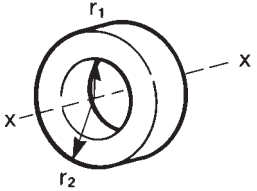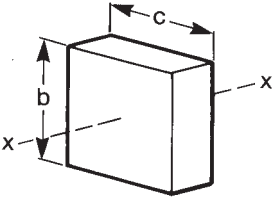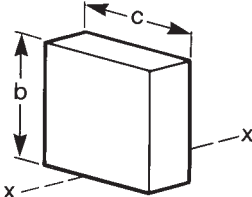	<b>Cylinder about Its Own Axis</b> <b>x-x</b>		
	Solid $K^2 = 1/2 r^2$	Hollow $K^2 = 1/2 (r_1^2 + r_2^2)$	
	<b>Axis through Center</b> <b>x-x</b>		
	Prism $K^2 = 1/12 (b^2 + c^2)$	Cylinder $K^2 = \frac{L^2 + 3r^2}{12}$	
	<b>Axis at One End</b> <b>x-x</b>		
	Prism $K^2 = 1/12 (4b^2 + c^2)$	Cylinder $K^2 = \frac{4L^2 + 3r^2}{12}$	

# English-Metric Conversion Factors

Multiply the base unit by the factor shown to obtain the desired conversion

Measurement	Base Unit	Factor	Conversion
Length	inch, in <i>millimeter, mm</i>	25.4 .03937	<i>millimeter, mm</i> inch, in
Torque	pound-inch, lb-in <i>newton-meter, Nm</i> pound-feet, lb-ft <i>newton-meter, Nm</i> ounce-inch, oz-in <i>newton-meter, Nm</i>	.112985 8.8507 1.355818 .73756 .007062 141.612	<i>newton-meter, Nm</i> pound-inch, lb-in <i>newton-meter, Nm</i> pound-feet, lb-ft <i>newton-meter, Nm</i> ounce-inch, oz-in
Moment of Inertia	pound-feet squared, lb-ft <sup>2</sup> <i>kilogram-meter squared, kgm<sup>2</sup></i>	.042 23.81	<i>kilogram-meter squared, kgm<sup>2</sup></i> pound-feet squared, lb-ft <sup>2</sup>
Kinetic energy	foot-pound, ft-lb <i>joule, J</i>	1.355818 .73756	<i>joule, J</i> foot-pound, ft-lb
Weight	pound, lb <i>kilogram, kg</i>	.453592 2.20462	<i>kilogram, kg</i> pound, lb
Horsepower (English)	horsepower, hp <i>kilowatt, Kw</i>	.7457 1.341	<i>kilowatt, kW</i> horsepower, hp
Thermal capacity	horsepower-seconds per minute, hp-sec/min	12.42833	<i>watts, W</i>
	<i>watts, W</i>	.08046	horsepower-seconds per minute hp-sec/min
Temperature	degrees Fahrenheit, °F <i>degrees Celcius, °C</i>	(°F - 32) × 5/9 (°C × 9/5) + 32	<i>degrees Celcius, °C</i> degrees Fahrenheit, °F

## Conversion Factors for Thermal Capacity

Base Unit	Multiply by	To Obtain
horsepower	33,000	ft-lb/min
hp-sec/min	550	ft-lb/min
BTU/min	777.385	ft-lb/min
watts	44.254	ft-lb/min

## Metric Bore and Keyways

Bore (millimeter) + .25 mm - .000 mm	Keyway (millimeter) Nominal
6	2 ξ 2
8	2 ξ 2
10	3 ξ 3
12	4 ξ 4
14	5 ξ 5
15	5 ξ 5
16	5 ξ 5
18	6 ξ 6
19	6 ξ 6
20	6 ξ 6
22	6 ξ 6
24	8 ξ 7
25	8 ξ 7
26	8 ξ 7
28	8 ξ 7
30	8 ξ 7

Contact factory for specific application information