


Friction Discs

New Stock Number	Old Stock No.	Description	Series Used on
8-004-002-00	–	2-1/8" OD X .75" PD spline drive X 1/4" thick	1-001-009, 1-001-011
8-004-006-00	–	<i>Obsolete - use 5-18-0002-00</i>	
8-004-101-00	410	9-1/4" OD X 3-3/4" square drive X 1/4" thick	DS, R, H-1000,42,000
8-004-102-00	–	9-1/4" OD X 4" PD spline drive X 1/4" thick (special duty)	DS, R, H-1000, 42,000, 81,000
8-004-104-00	–	9-1/4" OD X 4" PD spline drive X 1/4" thick	Splined DS, R, H-1000, 42,000, 81,000
8-004-105-00	–	9-1/4" OD X 4" PD spline drive X 1/4" thick (for use against brass)	NA-1000,42,000,81,000
8-004-201-00	430H	12-3/4" OD X 7.33" PD spline drive X 3/8" thick	1200, 1300, 46,000, 86,000
8-004-202-00	–	<i>Obsolete - use 8-004-201-00</i>	
8-004-203-00	–	9-1/4" OD X 5.5" PD spline drive X 1/8" thick <i>(obsolete- no replacement)</i>	42,000 (345, 460, 575 lb-ft torques)
8-004-205-00	–	<i>Obsolete - use 8-004-206-00</i>	
8-004-206-00	–	10" OD X 5.5" PD spline drive X 3/8" thick	82,000
8-004-208-00	–	10" OD X 5.5" PD spline drive X 3/8" thick (for use against brass)	82,000
8-004-304-00	–	3" OD X 1" square drive X 3/16" thick	1-103-051, 1-103-061, 1-103-071
8-004-401-00	440	<i>Obsolete - no replacement</i>	H-40 (replaced with 48,000 Series)
8-004-402-00	–	3-3/4" OD X 1.9" PD spline drive X 3/16" thick	H-40 (replaced with 48,000 Series)
8-004-403-00	–	4-7/16" OD X 1-3/4" square drive X .165" thick	104,000 (replaced with 48,000 Series)
8-004-405-00	–	3.7" OD X 1.75" PD spline drive X 3/16" thick	48,000
8-004-501-00	450H	5" OD X 1-3/4" square drive X 3/16" thick (kit 5-66-8452-00)	All 55,X00 and 50
8-004-501-01	–	<i>Obsolete - use 8-004-501-00 [without the (4) 1/2" diameter holes]</i>	
8-004-502-00	451H	<i>Obsolete - use 8-004-501-00</i>	
8-004-502-01	–	<i>Obsolete - use 8-004-501-00</i>	
8-004-503-01	–	<i>Obsolete - use 8-004-501-00</i>	UH, UHB, UHF, UHC, UHCB-50, 65,000, 65,300
8-004-504-00	–	5" OD X 2.4" PD spline drive x 3/16" thick	All 55,X00 and 50
8-004-506-00	–	5" OD X 2-1/3" spline X 7/32" thick	58,500
8-004-507-00	–	5" OD X 2" PD patented spline drive x 3/16" thick (kit 5-66-8462-00)	All 56,X00
8-004-601-00	460	3-7/8" OD X 1-3/4" square drive X 1/4" thick	Standard X-60, H-60, NA-60
8-004-602-00	–	<i>Obsolete - use 8-004-601-00</i>	
8-004-664-00	–	12-3/4" OD X 7.33" PD splined drive X 3/8" thick (for use against brass)	NA-1300, 46,000, 86,000
8-004-701-00	480	7-1/4" OD X 2-3/4" square drive X 1/4" thick (kit 5-66-8472-00)	Standard S, DS, R, H-80, H, HT-70, 87,000
8-004-702-00	–	7-1/4" OD X 2-3/4" square drive X 1/4" thick (special duty)	87,000, S, DS, R, H-80, H, HT-70
8-004-703-00	–	<i>Obsolete - use 8-004-702-00</i>	
8-004-704-00	–	<i>Obsolete - use 8-004-707-00</i>	
8-004-705-00	–	<i>Obsolete - use 8-004-702-00</i>	
8-004-706-00	–	<i>Obsolete - use 8-004-702-00</i>	EXG, EXGF, UH, UHF-70, 80, 67,000, 77,000
8-004-707-00	–	7-1/4" OD X 4" PD spline drive X 1/4" thick (kit 5-66-8478-00)	S, DS, R, H-80, H, HT-70, 87,000
8-004-707-02	–	7-1/4" OD X 4" PD spline drive X 1/4" thick (kit 5-66-8492-00)	87,000 pre-burnished
8-004-710-00	–	6-1/2" OD X 2-3/4" square drive X 1/4" thick	57,000
8-004-712-00	–	<i>Obsolete - use 8-004-710-00</i>	
8-004-716-00	–	7-1/4" OD X 4" PD spline drive X 1/4" thick (kit 5-66-8482-00)	87,000 high inertia
8-004-718-00	–	7-1/4" OD X 2-3/4" square drive X 1/4" thick (kit 5-66-8474-00)	87,000 high inertia
8-004-725-00	–	7-1/4" x 3" PD patented spline drive x 1/4" thick (kit 5-66-8483-00)	87,X00 (new spline)

New Stock Number	Old Stock No.	Description	Series Used on
5-18-0002-00	-	2-1/8" OD X .75" PD spline drive X 1/4" thick (non-metallic carrier ring)	1-001-015
5-18-2001-00	-	10" OD X 5.5" PD spline drive X 3/8" thick (C.I. carrier ring)	82,000
5-18-2002-00	-	10" OD X 5.5" PD spline drive X 3/8" thick (bronze carrier ring)	82,000
5-18-3001-00	-	Friction plate with bonded friction material one side (1 disc)	1-103-001, 1-103-011, 1-103-021
5-18-3002-00	-	Friction plate with bonded friction material two sided (2 disc)	1-103-021
5-18-6601-00	-	12-1/2" OD X 7.33" PD spline drive X 3/8" thick (C.I. carrier ring)	46,000, 86,000
5-18-6602-00	-	12-1/2" OD X 7.33" PD spline drive X 3/8" thick (bronze carrier ring)	46,000, 86,000
5-18-7001-00	-	7-1/4" OD X 4" PD spline drive 1/4" thick (bronze carrier ring)	87,000 (with CI or DI pressure plate and stationary disc)
5-18-7002-00	-	7-1/4" OD X 4" PD spline drive X 1/4" thick (bronze carrier ring)	87,000 (with brass pressure plate and stationary discs)

- Contact factory on date codes **before March 1986**.
- Friction disc date code **March 1986 to March 1, 1994**.

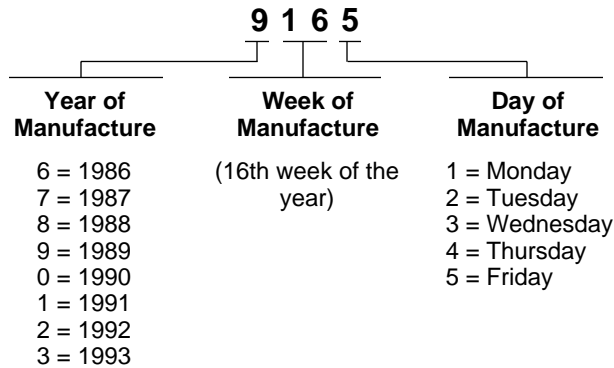

- Friction disc date code **after March 1, 1994**.

